APP CRS	Rwy Idg	8500
309°	TDZE	430
	Apt Elev	477

RNAV (RNP) Y RWY 31L

PALM SPRINGS INTL (PSP)

RNP AR APCH.

Missed approach requires minimum climb of 340′ per NM to 3000. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 1800, then climbing right turn to 4000 direct TRM VORTAC and hold.

ATIS	SOCAL APP CON	PALM SPRINGS TOWER★	GND CON	CLNC DEL	UNICOM
124.65	126.7 370.95 135.275 251.1	119.7 (CTAF) L 377.05	121.9	128.35	122.95

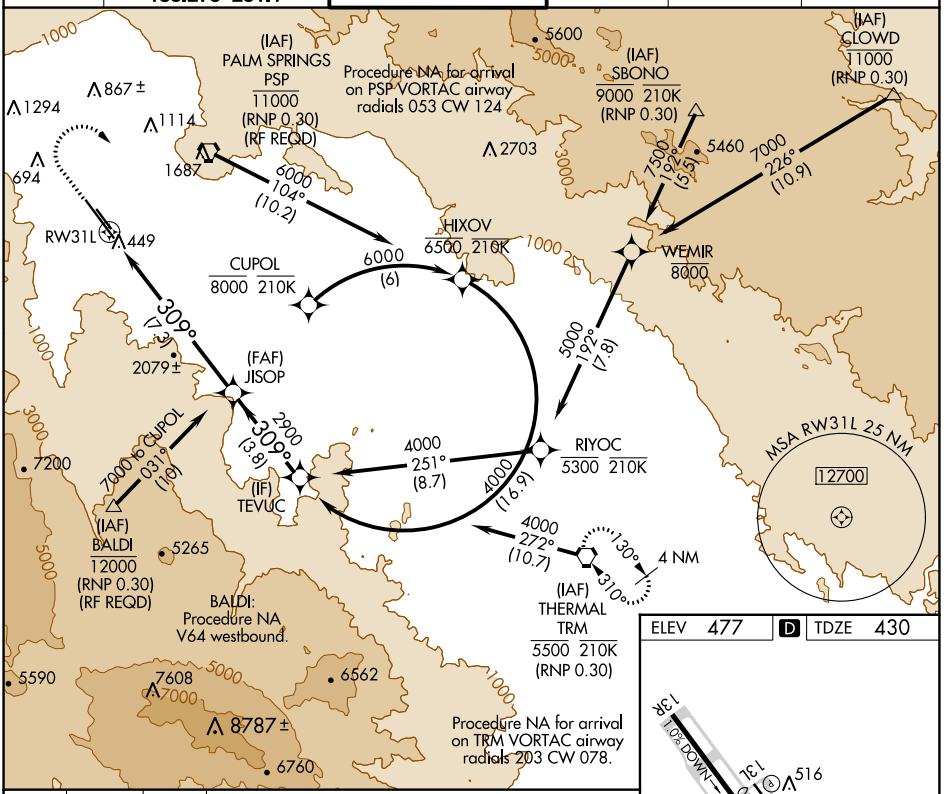

CATEGORY	A	B	C	D
RNP 0.30 DA	734-1 304 (300-1)			

AUTHORIZATION REQUIRED

ELEV 477 D TDZE 430

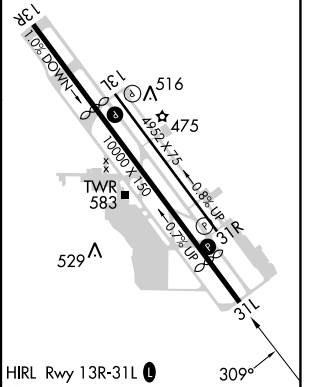

HIRL Rwy 13R-31L L
MIRL Rwy 13L-31R
REIL Rwys 13R and 31L L
REIL Rwys 13L and 31R

SW-3, 18 APR 2024 to 16 MAY 2024